



EXECUTIVE SUMMARY

Date printed: 2016-Dec-13
For Records Prior to: 2016-Dec-14

Locations: Herstal, Belgium

Nests: Buildings

Groups: Central



Total Annualized Summaries

1,443 USD
Monetary Loss

199 MMBTU/yr
Fuel Used

1,000 USD
Repair Cost


144,261 lb
Steam Loss

443 USD
Savings

9 months
Payback Period


23,304 lb
CO2 Emissions

TRAP TYPE SUMMARY

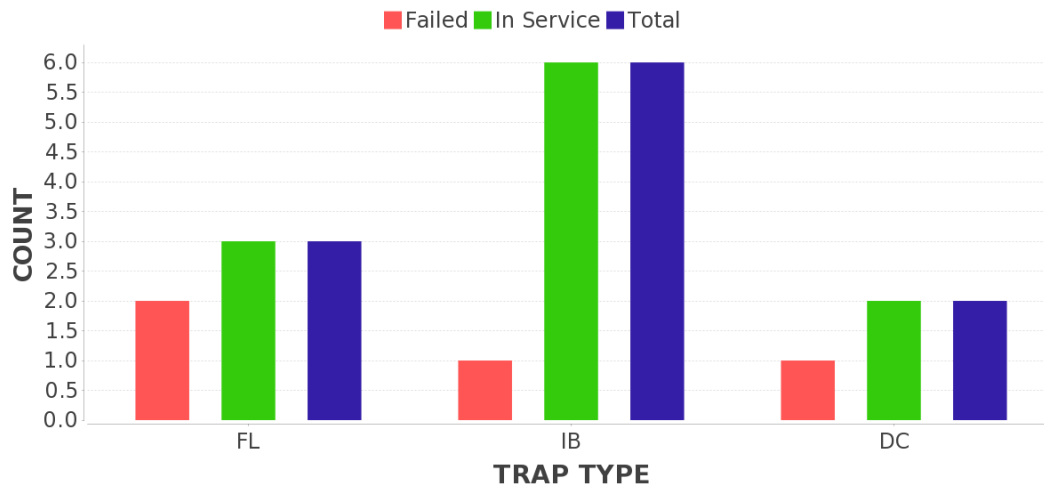


Description	Population Count	% of Total	Failure Count	In Service Failure	In Service Population
FL Float	3	27.3%	2	66.7%	3
DC Disc	2	18.2%	1	50%	2
IB Inverted Bucket	6	54.5%	1	16.7%	6
	11	100%	4	36.4%	11

MANUFACTURER SUMMARY

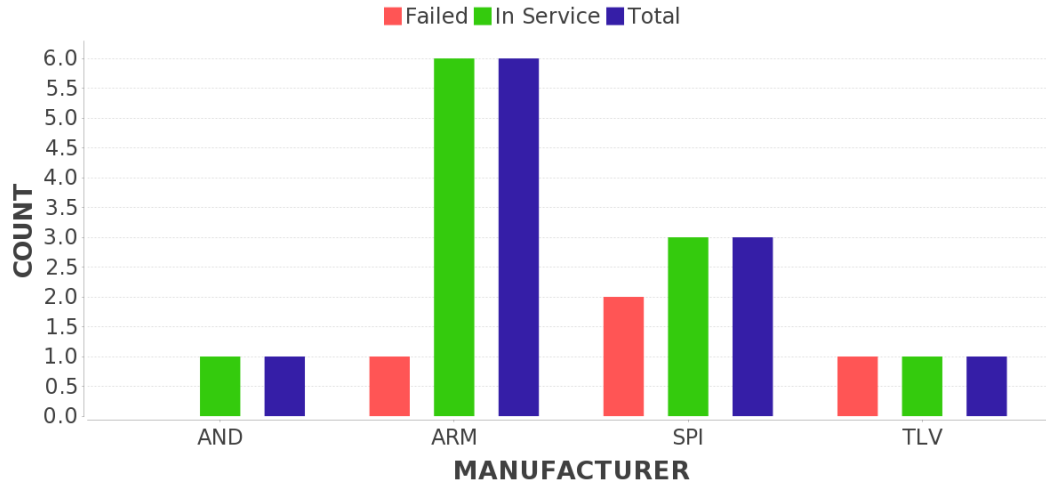

Description	Population Count	% of Total	Failure Count	In Service Failure	In Service Population
TLV TLV	1	9.1%	1	100%	1
SPI Spirax Sarco	3	27.3%	2	66.7%	3
ARM Armstrong	6	54.5%	1	16.7%	6
AND Anderson	1	9.1%	0	0%	1
	11	100%	4	36.4%	11


APPLICATION SUMMARY

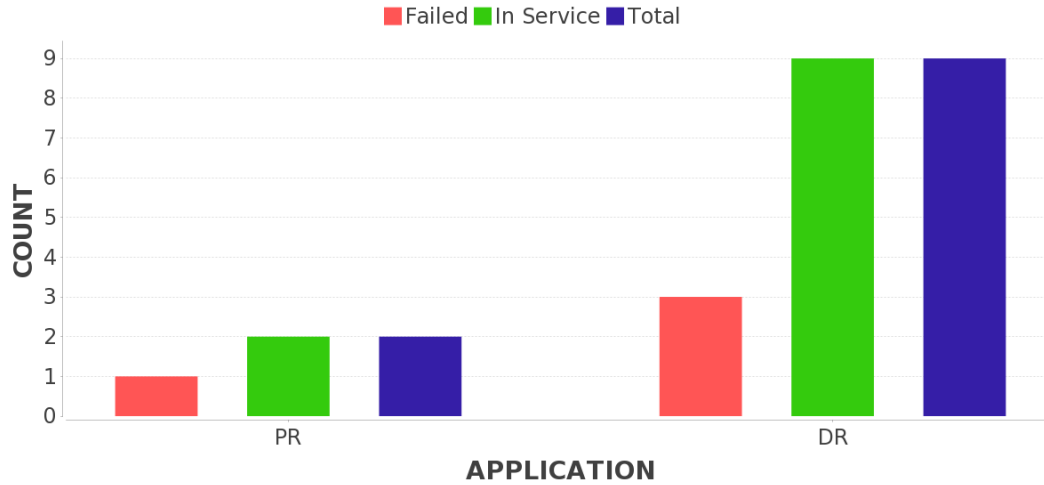

Description		Population Count	% of Total	Failure Count	In Service Failure	In Service Population
PR	Process	2	18.2%	1	50%	2
DR	Drip	9	81.8%	3	33.3%	9
		11	100%	4	36.4%	11

CONDITION SUMMARY

RC CD BT OK LK



	Description	Population Count	% of Total
OK	Good	7	63.6%
RC	Rapid Cycling	1	9.1%
CD	Cold	1	9.1%
BT	Blow Thru	1	9.1%
LK	Leaking	1	9.1%
		11	100%

Total Annualized Summaries

1,443 USD
Monetary Loss

199 MMBTU/yr
Fuel Used

1,000 USD
Repair Cost


144,261 lb
Steam Loss

443 USD
Savings

9 months
Payback Period


23,304 lb
CO2 Emissions

TRAP TYPE SUMMARY

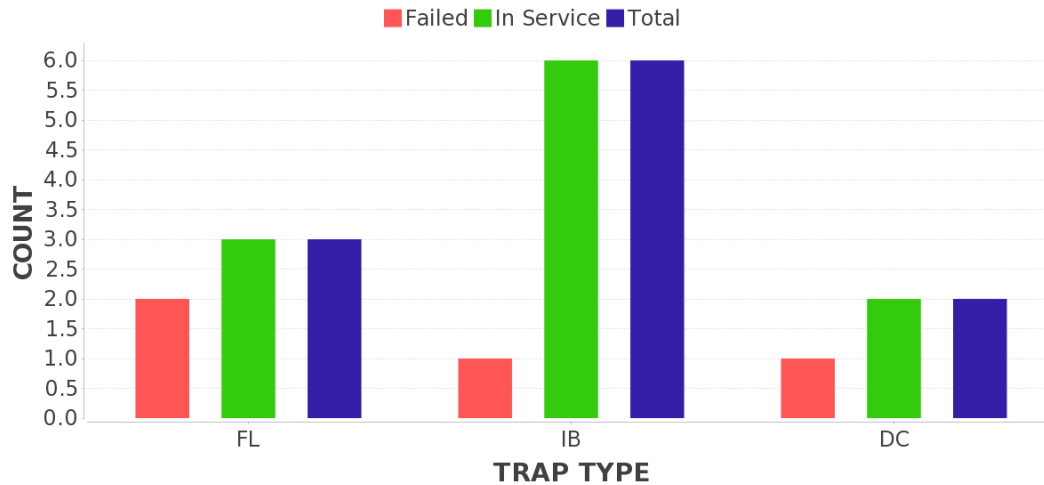


Description	Population Count	% of Total	Failure Count	In Service Failure	In Service Population
FL Float	3	27.3%	2	66.7%	3
DC Disc	2	18.2%	1	50%	2
IB Inverted Bucket	6	54.5%	1	16.7%	6
Total	11	100%	4	36.4%	11

MANUFACTURER SUMMARY

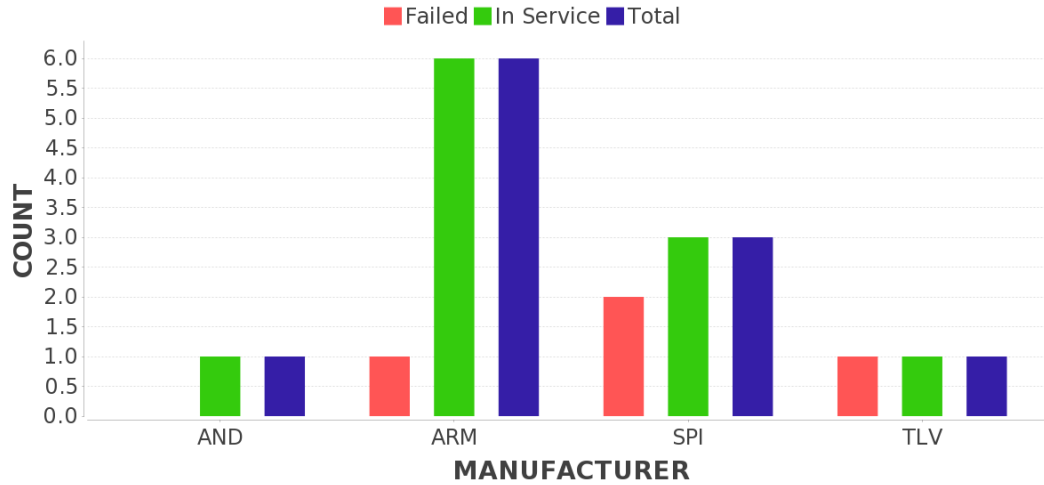

Description	Population Count	% of Total	Failure Count	In Service Failure	In Service Population
TLV TLV	1	9.1%	1	100%	1
SPI Spirax Sarco	3	27.3%	2	66.7%	3
ARM Armstrong	6	54.5%	1	16.7%	6
AND Anderson	1	9.1%	0	0%	1
	11	100%	4	36.4%	11


APPLICATION SUMMARY

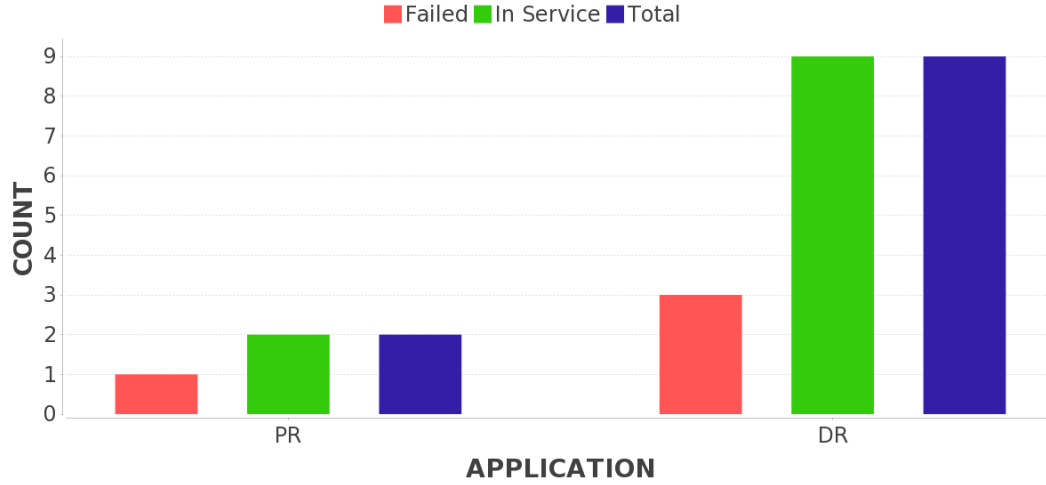

Description		Population Count	% of Total	Failure Count	In Service Failure	In Service Population
PR	Process	2	18.2%	1	50%	2
DR	Drip	9	81.8%	3	33.3%	9
		11	100%	4	36.4%	11

CONDITION SUMMARY

RC CD BT OK LK



	Description	Population Count	% of Total
OK	Good	7	63.6%
RC	Rapid Cycling	1	9.1%
CD	Cold	1	9.1%
BT	Blow Thru	1	9.1%
LK	Leaking	1	9.1%
		11	100%